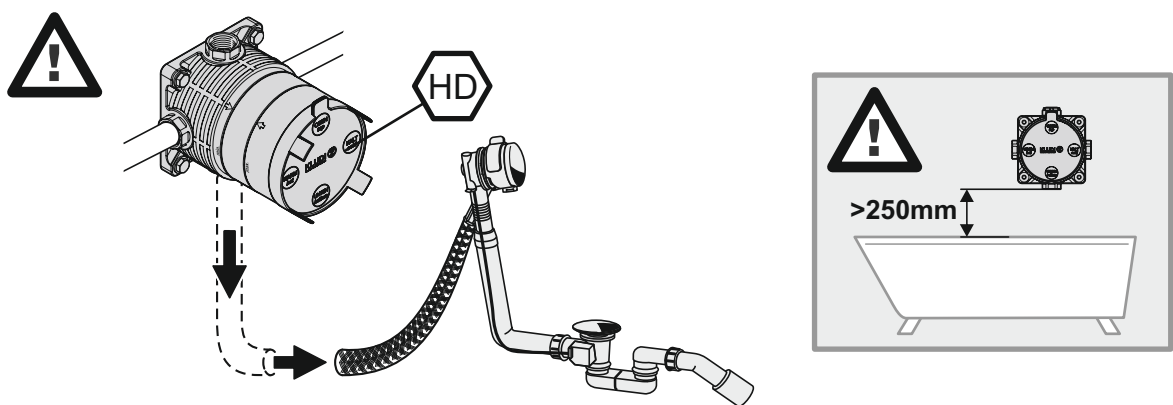
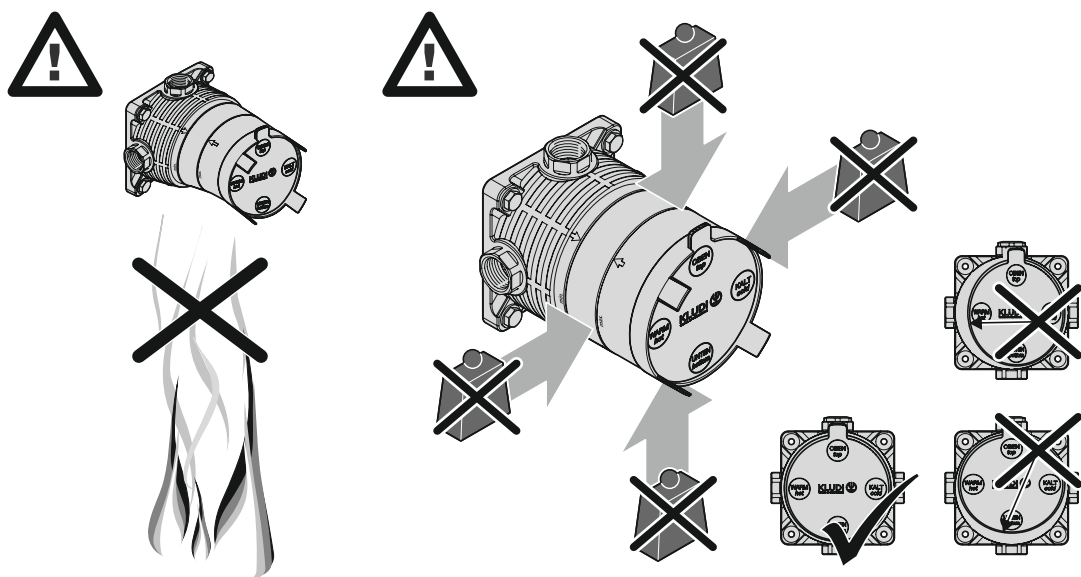




DIN EN 806
DIN EN 1717
DIN 1988
Global Standards

°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi

min. 1 bar / 14,5 psi

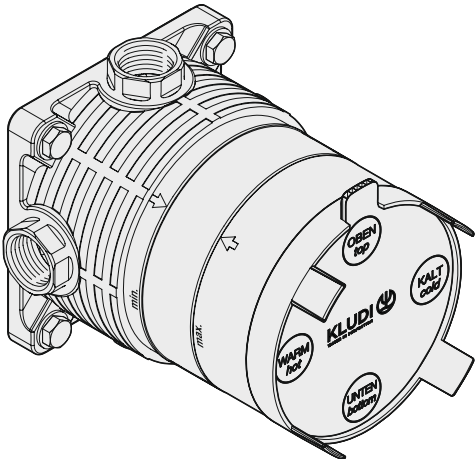
max. 10 bar / 145 psi

3 min.

max. 70 °C / 158 °F

www.kludi.com






- D** Montage- und Bedienanleitung
- CN** 安装及操作指南
- CZ** Návod k instalaci a k použití
- E** Instrucciones de montaje y de manejo
- F** Instructions de montage et mode d'emploi
- GB** Installation and operating instructions
- GR** ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- H** Szerelési és használati utasítás
- I** Istruzioni di montaggio e per l'uso
- NL** Montagehandleiding en Gebruiksaanwijzing
- PL** Instrukcja montażu i obsługi
- RO** Instrucțiuni de montaj și utilizare
- RU** Руководство по монтажу и эксплуатации
- SK** Návod na montáž a obsluhu

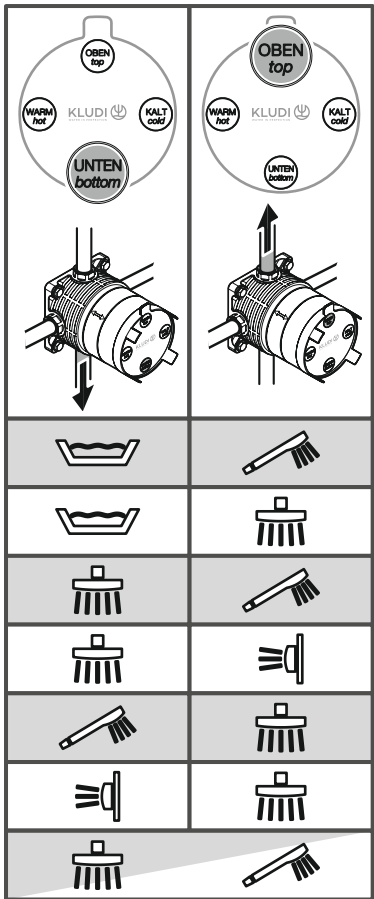





Kludi GmbH & Co. KG
Postfach 25 60
D-58685 Menden
Am Vogelsang 31-33
D-58706 Menden

Telefon: (D) +49 (0) 23 73 / 9 04-0
Telefax: (D) +49 (0) 23 73 / 90 4-4 65
E-Mail: info@kludi.de
Internet: www.kludi.com

KLUDI 
WATER IN PERFECTION

KLUDI Serien				
				
HD xx657xx	xx650xx	xx655xx	xx830xx	xx835xx
●	●		●	
●			●	
	●		●	
	●		●	
			●	
		●		●



KLUDI Serien		KLUDI Push		
				
HD xx663xx	xx659xx	38711xx 38712xx	38901xx 38902xxTHM	38911xx 38912xxTHM
●	●	●		●
●	●	●		●
	●	●		●
	●	●		●
	●	●		●
		●		●
			●	

