



Diagram 9: A beam of length 250 mm with a 100 N load at the right end. The beam is supported by a pin support at the left end and a roller support at the right end. The beam is inclined at an angle of 30° to the horizontal.

Diagram 10: A beam of length 500 mm with a 100 N load at the right end. The beam is supported by a pin support at the left end and a roller support at the right end. The beam is inclined at an angle of 30° to the horizontal.

Diagram 11: A beam of length 250 mm with a 100 N load at the right end. The beam is supported by a pin support at the left end and a roller support at the right end. The beam is inclined at an angle of 30° to the horizontal.

Diagram 12: A beam of length 500 mm with a 100 N load at the right end. The beam is supported by a pin support at the left end and a roller support at the right end. The beam is inclined at an angle of 30° to the horizontal.

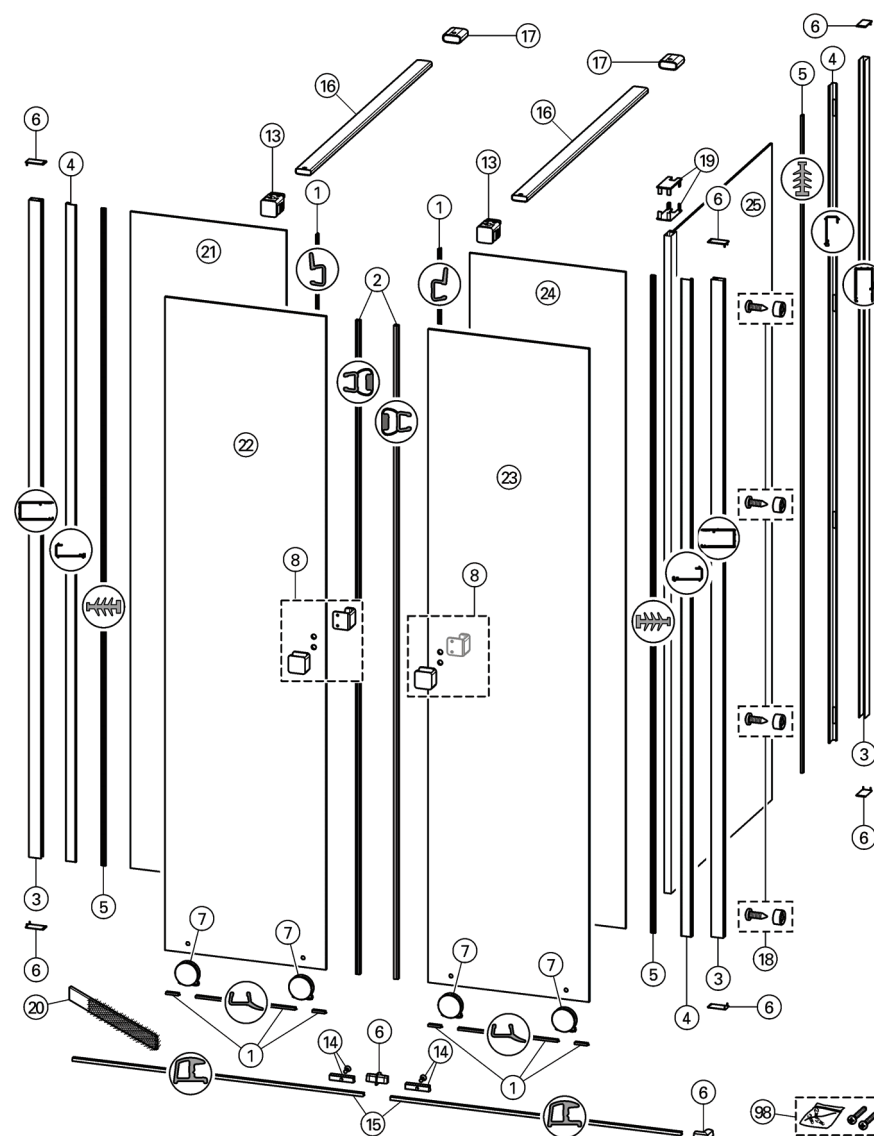

Identity number
XXXXXX . XXX . XXX

XXX . 001 . XXXX

Made in Germany