


Höhe mm	Typ	Nabenabstand mm *	Tiefe	Wasserinhalt ltr/m	Längen mm von-bis
300	22	245	105	3,20	400-2200
	33	245	160	5,00	600-2000
400	22	345	105	4,10	400-2200
	33	345	160	6,10	600-2000
500	11	445	67	2,50	400-2000
	21	445	70	4,93	400-2200
	22	445	105	5,00	400-2200
	33	445	160	7,20	600-2200
600	11	545	67	2,90	400-2000
	21	545	70	5,70	400-2200
	22	545	105	5,90	400-2200
	33	545	160	8,30	600-2200
900	11	845	67	3,50	400-1200
	21	845	70	7,70	400-1200
	22	845	105	7,60	400-1400
	33	845	160	11,25	600-1400

* Nabenabstand: Abstand zwischen Vor- und Rücklauf

Prüfdruck	max. Betriebsdruck	max. Betriebstemp.	Farbe
13 bar	10 bar	110 Grad C	RAL 9016

10 Jahre Herstellergarantie

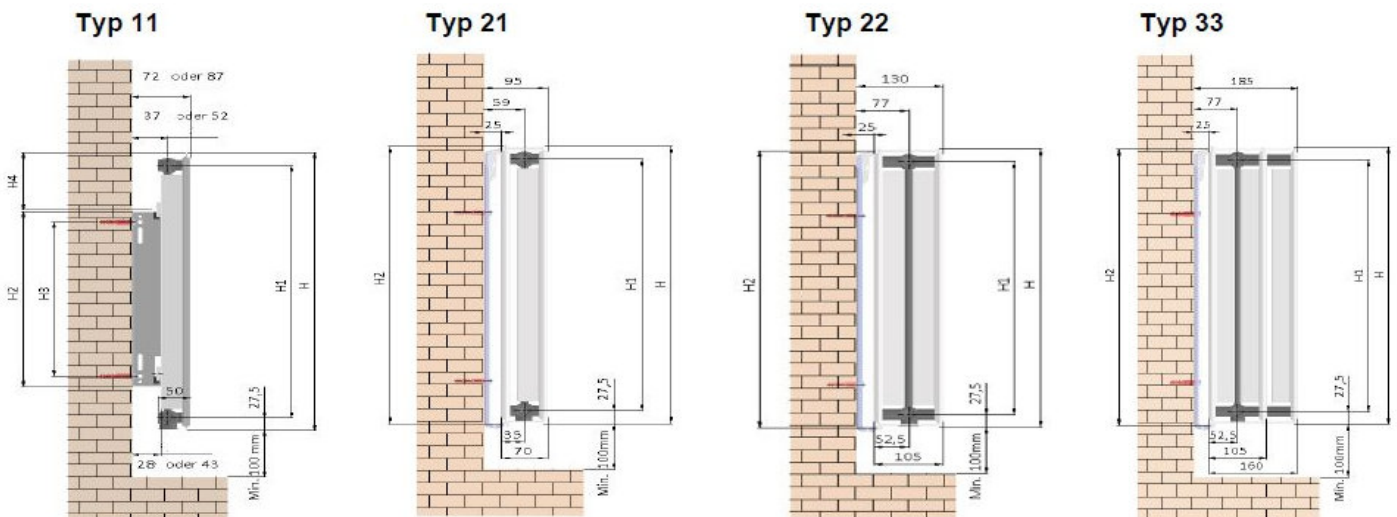

		TYP 11			TYP 21			TYP 22					TYP 33				
Baulänge (mm)	Bauhöhe (mm)	500	600	900	500	600	900	300	400	500	600	900	300	400	500	600	900
400	Watt :70/55°C	251	293	401	380	436	580	324	411	491	566	756					
	Watt :55/45°C	160	187	256	242	279	370	207	262	314	361	482					
500	Watt :70/55°C	314	366	501	475	546	725	404	514	614	707	945					
	Watt :55/45°C	201	234	320	303	348	463	258	328	392	451	603					
600	Watt :70/55°C	377	439	601	570	655	870	485	616	737	848	1134	692	879	1052	1216	1653
	Watt :55/45°C	241	280	383	364	418	555	310	393	470	541	723	442	561	672	776	1055
700	Watt :70/55°C	440	512	701	665	764	1015	566	719	860	990	1322	807	1025	1228	1419	1928
	Watt :55/45°C	281	327	447	424	487	648	361	459	549	632	844	515	654	784	905	1231
800	Watt :70/55°C	503	585	801	760	873	1160	647	822	983	1131	1511	923	1171	1403	1621	2204
	Watt :55/45°C	321	374	511	485	557	740	413	525	627	722	965	589	748	896	1035	1407
900	Watt :70/55°C	566	659	901	855	982	1305	728	925	1106	1273	1700	1038	1318	1579	1824	2479
	Watt :55/45°C	361	420	575	545	627	833	465	590	706	812	1085	663	841	1008	1164	1582
1000	Watt :70/55°C	629	732	1001	950	1091	1450	809	1027	1229	1414	1889	1154	1464	1754	2027	2755
	Watt :55/45°C	401	467	639	606	696	926	516	656	784	902	1206	736	935	1120	1293	1758
1100	Watt :70/55°C									1352	1555	2078					
	Watt :55/45°C									863	993	1326					
1200	Watt :70/55°C	754	878	1202	1140	1309	1740	971	1233	1474	1697	2267	1384	1757	2105	2432	3306
	Watt :55/45°C	481	560	767	727	836	1111	620	787	941	1083	1447	883	1121	1343	1552	2110
1400	Watt :70/55°C	880	1025		1330	1528		1132	1438	1720	1980	2645	1615	2050	2456	2837	3857
	Watt :55/45°C	562	654		849	975		723	918	1098	1263	1688	1031	1308	1567	1811	2461
1600	Watt :70/55°C	1006	1171		1519	1746		1294	1644	1966	2262		1846	2343	2807	3243	
	Watt :55/45°C	642	747		970	1114		826	1049	1255	1444		1178	1495	1791	2070	
1800	Watt :70/55°C	1132	1317		1709	1964		1456	1849	2212	2545		2076	2636	3157	3648	
	Watt :55/45°C	722	841		1091	1253		929	1180	1411	1624		1325	1682	2015	2328	
2000	Watt :70/55°C	1257	1464		1899	2182		1618	2055	2457	2828		2307	2929	3508	4054	
	Watt :55/45°C	802	934		1212	1393		1033	1311	1568	1805		1472	1869	2239	2587	
2200	Watt :70/55°C				2089	2400		1780	2260	2703	3111				3859	4459	
	Watt :55/45°C				1333	1532		1136	1443	1725	1985				2463	2846	